



## RCA-OMN024-15



Pigtail not included

### MATERIALS

#### CASE

- Fiber Reinforced Plastic Tube
- Fiber Reinforced Plastic Cap
- Water based paint

#### STAND, WIRE, & CONNECTOR

- Anodized Iron
- Gold Plated Copper Connector
- Anodized Iron U bolts

### SPECIFICATION


■ FREQUENCY:	2.4		<b>Ghz</b>
■ BEAMWIDTH:	48	elevation	<b>Degree</b>
■ BEAMWIDTH:	Omni	azimuth	<b>Degree</b>
■ GAIN:	15		<b>dB</b>
■ POLARITY:		Vertical	
■ FRONT TO BACK RATIO	N.A.		<b>dB</b>
■ WIND LOAD:	N.A.		<b>Lbs</b>
■ WIND LOAD:	N.A.		<b>Lbs</b>
■ LENGTH:	1.5		<b>meter</b>
■ WEIGHT:	2		<b>Lbs</b>
■ CONNECTOR:	N Type Connector		
■ CABLE LENGTH **:	Custom made		
■ CABLE LOSS:			<b>dB/meter</b>
■ INPUT POWER:	100	max	<b>Watt</b>

\*\* For special request please indicate in the form additional charge will be applied


*This document and the information contained is property of Roughclaw Enterprise. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. Roughclaw Enterprise reserves the right at any time to change said content, circuitry and specifications.*

## TEST DATA


### Smith Chart

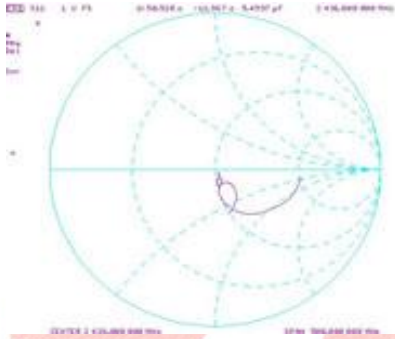

### Return Loss

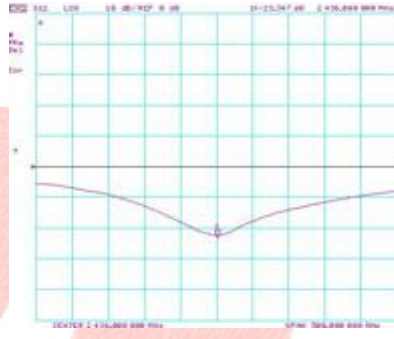

### SWR

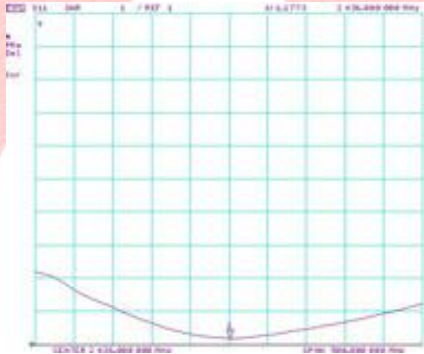

### Phase Angle



*This document and the information contained is property of Roughclaw Enterprise. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. Roughclaw Enterprise reserves the right at any time to change said content, circuitry and specifications.*

