


RCA-PDA002-08

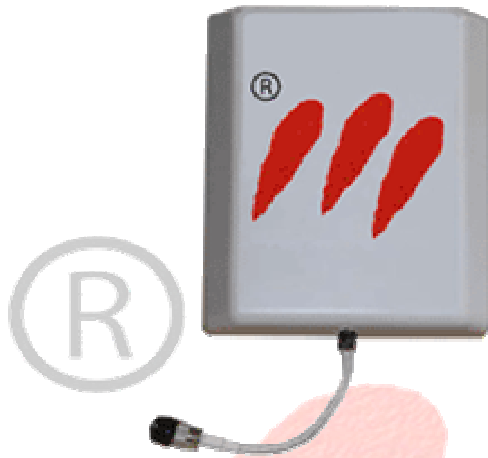

Indoor or Outdoor Type

MATERIALS

CASE

- UV Protected ABS case
- Water Proof Case

STAND, WIRE, & CONNECTOR

- N Type connector
- Anodized iron clamp
- Low Loss RF Copper Pigtail cable

SPECIFICATION

■ FREQUENCY:	825~960 / 1710~2500	Mhz
■ BEAMWIDTH:	50 elevation	Degree
■ BEAMWIDTH:	70 azimuth	Degree
■ GAIN:	8	dB
■ POLARITY:	Vertical	
■ FRONT TO BACK RATIO:	≥ 22	dB
■ INPUT POWER:	50	Watts
■ VSWR	<1.5	
■ WIND LOAD:	100	Km/h
■ IMPEDANCE	50	ohms
■ WEIGHT:	600	grams
■ CONNECTOR:	N-Type Connector	
■ CABLE:	Pigtail	
■ Panel Type	Indoor / Outdoor	
■ SIZE:	210 x180 x 45	mm

This document and the information contained is property of Roughclaw Enterprise. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. Roughclaw Enterprise reserves the right at any time to change said content, circuitry and specifications.